PRODUCT DATA SHEET

DAB-151T • 701394

PRODUCT DETAILS

The DAB 151T is a rugged cast iron, twin impeller. selfpriming, surface mounted jet pump suitable for use in a wide range of applications and especially where there is the requirement to lift water from the source.

The distinctive front casting contains a jet and venturi which provides suction capability of up to 8m.

Proven over many years the DAB 151T is embodiment of a 'Dependable DAB'.

A P P L I C A T I O N S

- Suppying water to domestic installations
- Ideal for use in small-scale agriculture or horticulture
- Pressure boosting, irrigation, wash down or other limited industrial services
- Designed for pumping from tanks, rivers and dams where air bubbles or small particles of sand are present
- Situations where self priming operation is necessary

FEATURES

- Self priming centrifugal pump with excellent suction capability
- 230V or 400V three phase TEFC motor with in-built auto reset thermal overload to prevent pump from damage

To protect the pump from excessive cycling and to isolate from the effects of water hammer, adding a pressure tank to the system is highly recommneded

TECHNICAL DATA

RATED POWER (P2)	1.1kW (1.5hp)
MAX. FLOW [LPM]	75 LPM
MAX. HEAD [M]	75m
MAX. PRESSURE RATING	8 bar
FLUID TEMP RANGE	0 - 35 deg C
MAX. AMBIENT TEMP	40 deg C
PUMP BODY	GJL 200 Cast Iron
IMPELLER	Glass reinforced Noryl
JET, VENTURI, DIFFUSER	Glass reinforced Noryl
MECHANICAL SEAL	Carbon Ceramic Nitrile
O RINGS	Nitrile

RATED VOLTAGE (V)	3~ 230 / 400V 50 hz
RATED CURRENT (A)	5.2A / 3A
RATED SPEED (RPM)	2800 - 2 pole
IP RATING	I.P. 44
SUCTION CONNECTION	1 1/4" G (BSP)
DISCHARGE CONNECTION	1" G (BSP)
AUTOMATIC OPERATION	No - bare pump only
MOTOR PROTECTION	Auto re-setting thermal overload
CARTON DIMENSIONS	612mm L x 248mm W x 279mm H
GROSS WEIGHT (KG)	31kg










CURVE

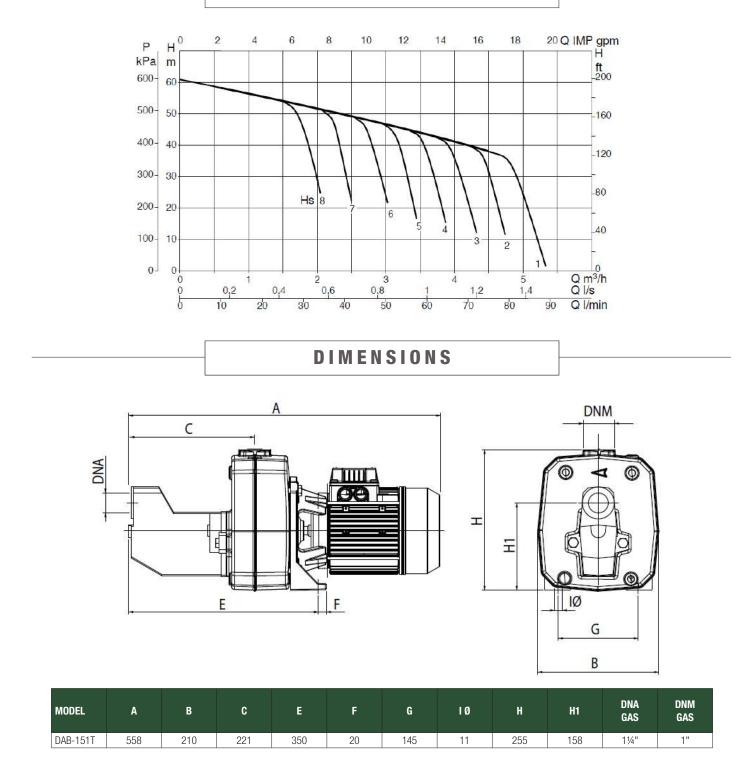

WARRANTY / CERTIFICATIONS



